

# RED LASER DIODE

## DL-3149-057

# SANYO

Ver.1 Jun. 2000

### Features

- Short wavelength : 670 nm (Typ.)
- Low threshold current :  $I_{th} = 25$  mA (Typ.)
- High operating temperature : 5 mW at 60°C
- Small package :  $\phi 5.6$  mm

### Applications

- Laser beam printer
- Bar-code scanner

### Absolute Maximum Ratings

( $T_c=25^\circ\text{C}$ )

Parameter		Symbol	Ratings	Unit
Light Output	CW	$P_o$	7	mW
Reverse Voltage	Laser	$V_R$	2	V
	PD		30	
Operating Temperature		$T_{opr}$	-10 ~ +60	°C
Storage Temperature		$T_{stg}$	-40 ~ +85	°C


### Electrical and Optical Characteristics <sup>1) 2)</sup>

( $T_c=25^\circ\text{C}$ )

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit
Threshold Current		$I_{th}$	CW	-	25	35	mA
Operating Current		$I_{op}$	$P_o=5\text{mW}$	-	40	45	mA
Operating Voltage		$V_{op}$	$P_o=5\text{mW}$	-	2.3	2.6	V
Lasing Wavelength		$\lambda_p$	$P_o=5\text{mW}$	660	670	678	nm
Beam <sup>3)</sup> Divergence	Perpendicular	$Q_v$	$P_o=5\text{mW}$	25	30	35	°
	Parallel	$Q_h$	$P_o=5\text{mW}$	6.5	8	10	°
Off Axis Angle	Perpendicular	$dQ_v$	-	-	-	$\pm 3$	°
	Parallel	$dQ_h$	-	-	-	$\pm 3$	°
Differential Efficiency		$dP_o/dI_{op}$	-	0.2	0.4	0.6	mW/mA
Monitoring Output Current		$I_m$	$P_o=5\text{mW}$	0.5	1.5	2	mA
Astigmatism		$A_s$	$P_o=5\text{mW}$	-	8	-	$\mu\text{m}$


1) Initial values 2) All the above values are evaluated with Tottori Sanyo's measuring apparatus

3) Full angle at half maximum Note : The above product specification are subject to change without notice.

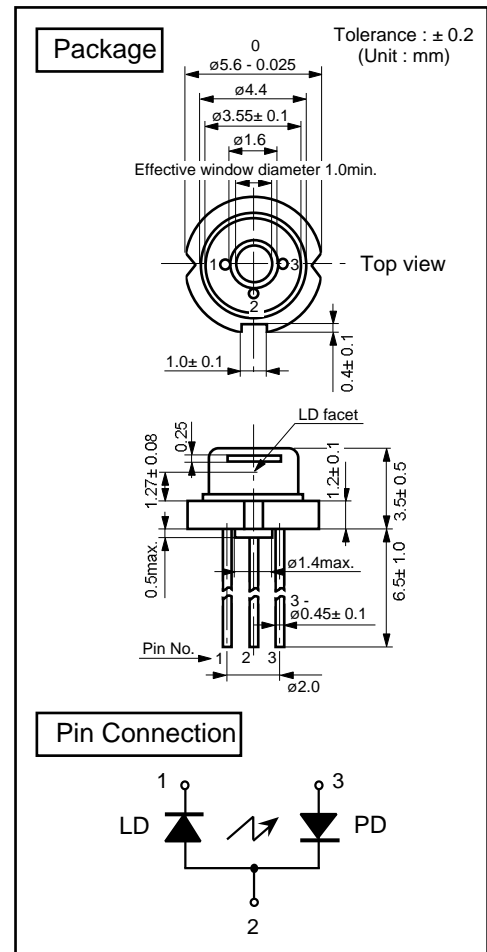


## Characteristics


Output power vs. Forward current

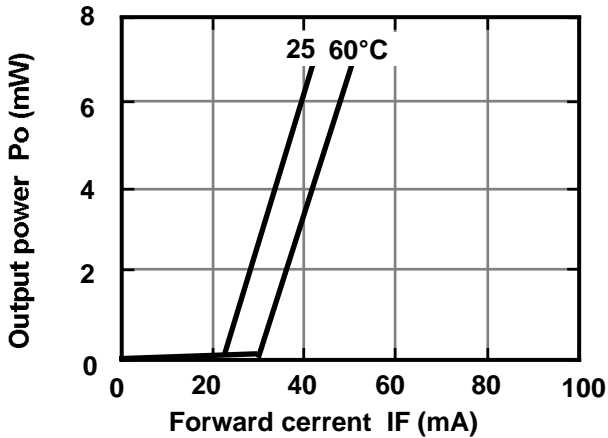


Threshold current vs. Temperature

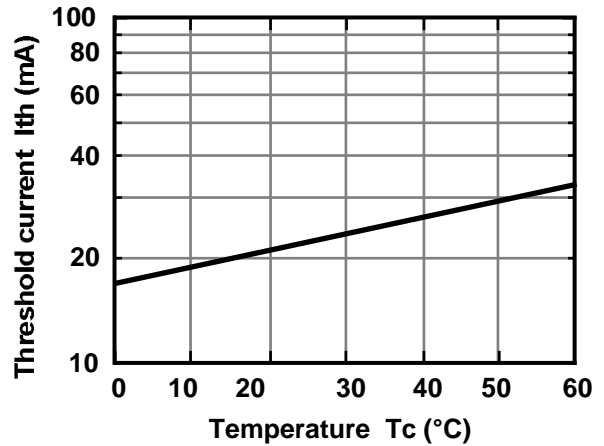


Monitoring current vs. Output power

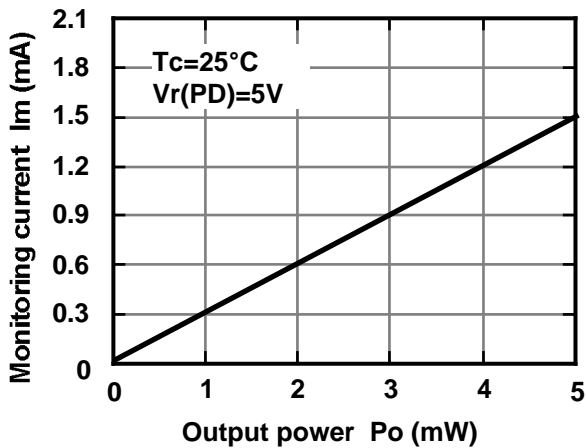


Beam divergence

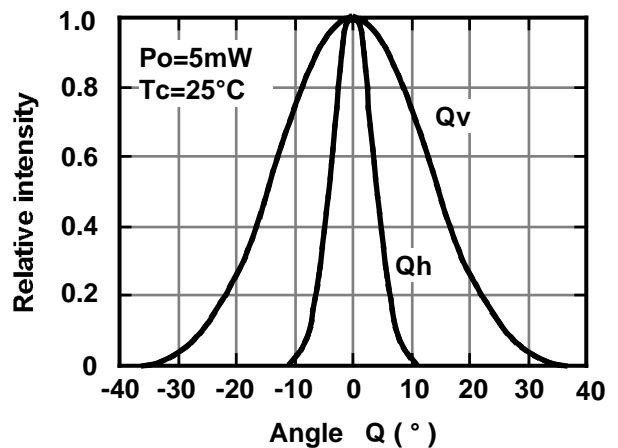

Lasing wavelength vs. Temperature

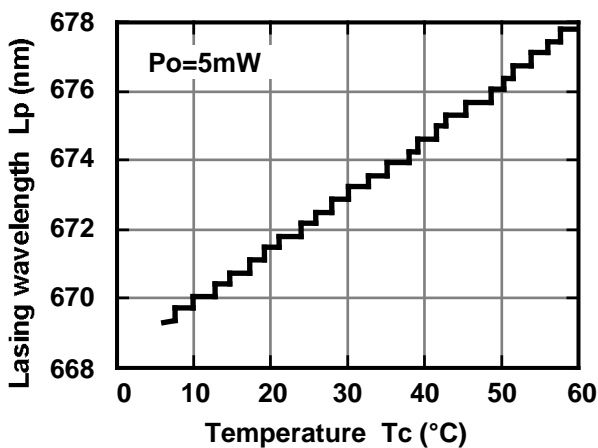

Lasing wavelength vs. Output power

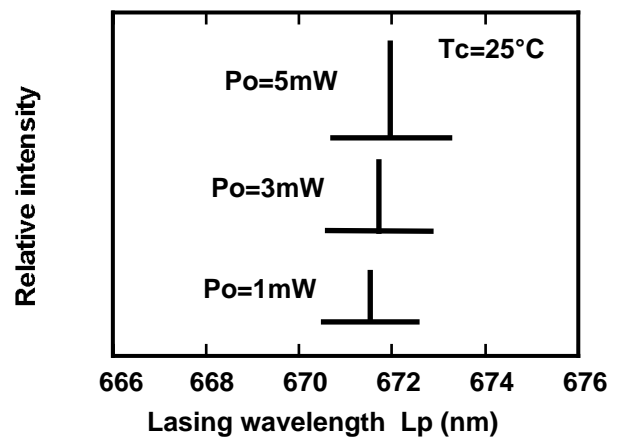

This is typical data and it may not represent all products.