

RED LASER DIODE

DL-6148-030

Tentative

SANYO

Ver.5 Jul. 2006

Features

- Wavelength : 638 nm (Typ.)
- Output power : 40 mW (CW)
- Threshold current : $I_{th} = 60 \text{ mA}$ (Typ.)
- Low aspect ratio 2


Applications

Laser Display
Fiber module
Industry machinery

Absolute Maximum Ratings

($T_c=25^\circ\text{C}$)

Parameter		Symbol	Ratings	Unit
Light Output	CW	P_o (CW)	40	mW
Reverse Voltage	Laser	VR	2	V
	PD		30	
Operating Temperature		Topr	-10 to +50	°C
Storage Temperature		Tstg	-40 to +85	°C

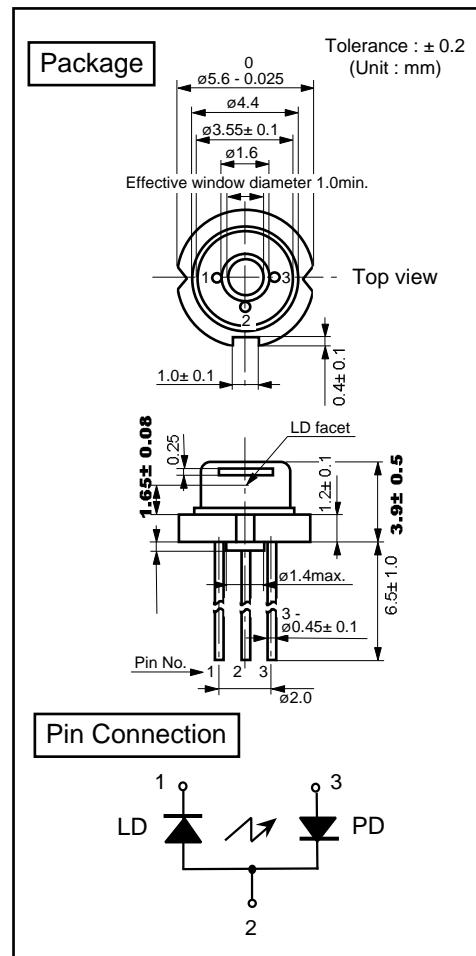

Electrical and Optical Characteristics 1) 2)

($T_c=25^\circ\text{C}$)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Threshold Current	I_{th}	CW	-	60	85	mA
Operating Current	I_{op}	$P_o=40\text{mW}$	-	100	130	mA
Operating Voltage	V_{op}	$P_o=40\text{mW}$	-	2.4	2.7	V
Lasing Wavelength	λ_p	$P_o=40\text{mW}$	635	638	645	nm
Beam Divergence ³⁾	Perpendicular	$P_o=40\text{mW}$	12	16	22	°
	Parallel	$P_o=40\text{mW}$	6.5	8.5	12	°
Off Axis Angle	Perpendicular	dQ_v	-	-3	-	3
	Parallel	dQ_h	-	-3	-	3
Differential Efficiency	SE	-	0.8	1.0	1.2	mW/mA
Monitoring Output Current	I_m	$P_o=40\text{mW}$	0.3	0.6	0.9	mA

1) Initial values 2) All the above values are evaluated with Tottori Sanyo's measuring apparatus

3) Full angle at half maximum


Note : The above product specification are subject to change without notice.

Tottori SANYO Electric Co., Ltd. Photonics Business Unit


5-318, Tachikawa, Tottori 680-8634 Japan TEL : +81-857-21-2137 FAX : +81-857-21-2161

Characteristics


Output power vs. Forward current

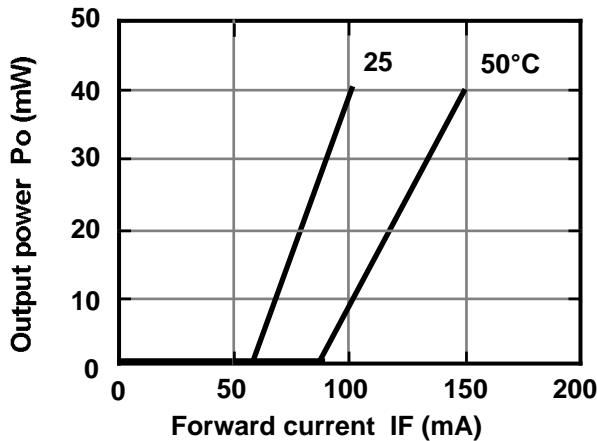


Threshold current vs. Temperature

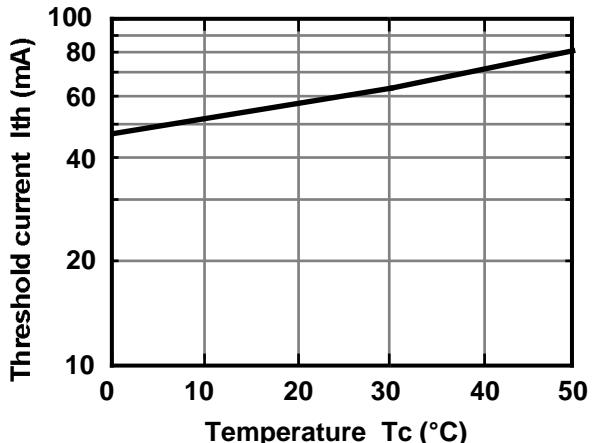


Monitoring current vs. Output power

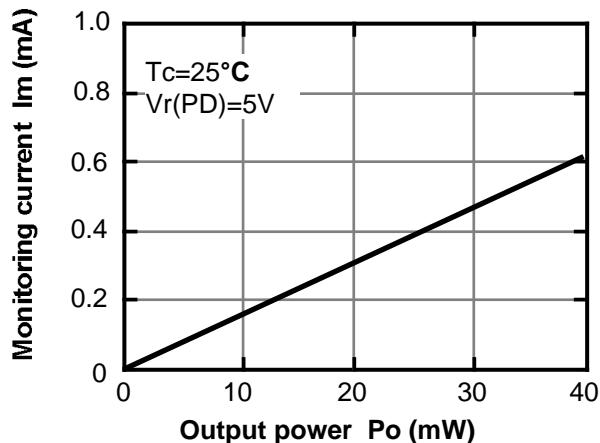


Beam divergence

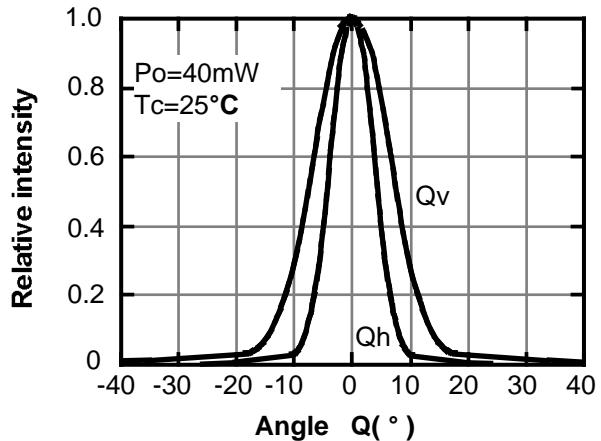

Lasing wavelength vs. Temperature

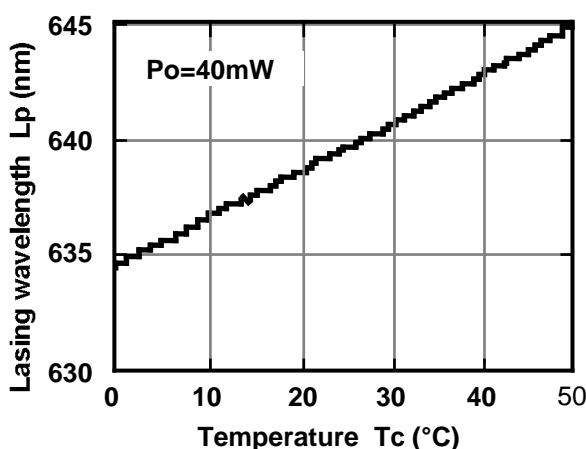

Lasing wavelength vs. Output power

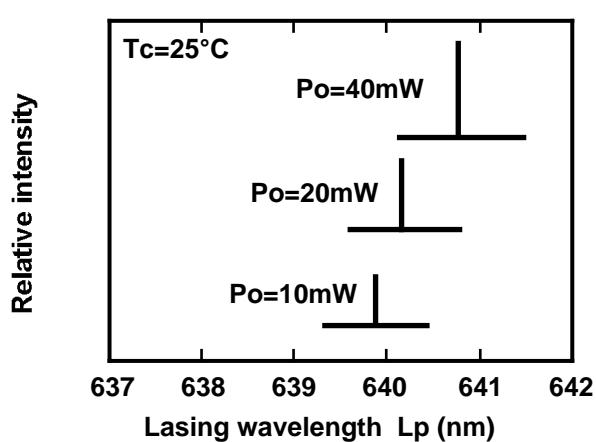

This is typical data and it may not represent all products.