

# AlGaInP Visible Laser Diode

## ADL-66Z01HL

6-2D-LD66-006\_Rev.00

★660nm 100mW 50°C

Reliable High Power Operation

### • Features


1. Highly reliable / COD free
2. Higher power
3. Monitor PD included

### • Applications

1. High power Laser modules
2. Industrial laser markers / measuring instruments
3. Medical applications

### • Absolute maximum ratings

Parameter	Symbol	Condition	Rating	Unit
Light output power	$P_O$	CW	110	mW
Reverse voltage (LD)	$V_{RL}$	-	2	V
Reverse voltage (PD)	$V_{RD}$	-	30	V
Forward current (PD)	$I_{FD}$	-	10	mA
Case temperature	$T_C$	-	-10~+50	°C
Storage temperature	$T_S$	-	-40~+85	°C

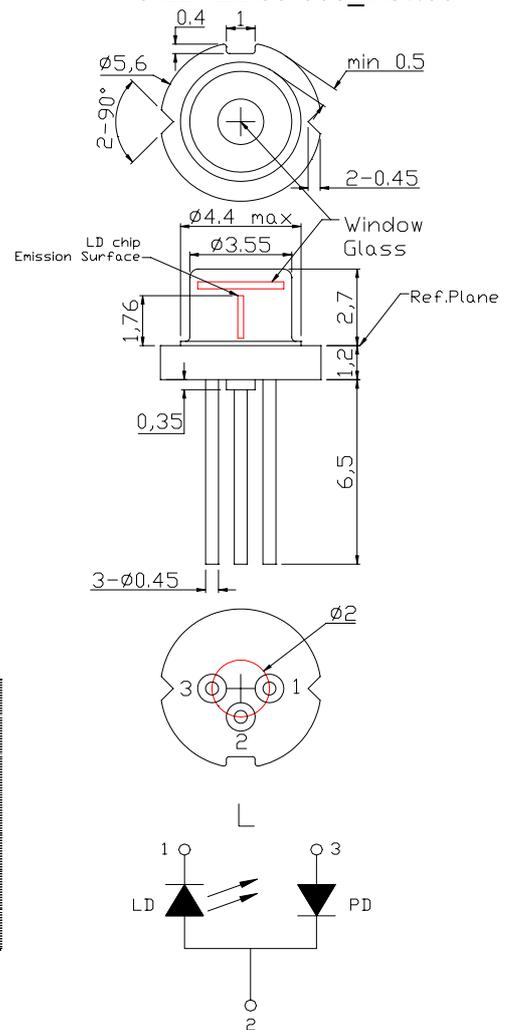

### • Electrical and optical characteristics ( $T_c=25^\circ\text{C}$ )

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Peak wavelength	$\lambda$	654	658	662	nm	$P_o=100\text{mW}$
Threshold current	$I_{th}$	-	55	70	mA	$P_o:5-10\text{mW}$
Operating current	$I_{op}$	130	142	190	mA	$P_o=100\text{mW}$
Operating voltage	$V_{op}$	2.0	2.65	2.9	V	$P_o=100\text{mW}$
Differential efficiency	$\eta$	0.8	1	1.25	mW/mA	$P_o=90-100\text{mW}$
Monitor current – L type	$I_m$	1.0	1.5	2.0	mA	$P_o=100\text{mW}, V_{RD}=5\text{V}$
Parallel divergence angle	$\theta_{\parallel}$	7	10	12	deg	
Perpendicular divergence angle	$\theta_{\perp}$	15	17	19	deg	
Parallel FFP deviation angle	$\Delta\theta_{\parallel}$	-3	0	+3	deg	$P_o=100\text{mW}$
Perpendicular FFP deviation angle	$\Delta\theta_{\perp}$	-3	0	+3	deg	
Emission point accuracy	$\Delta x \Delta y \Delta z$	-80	0	+80	um	

### • Precautions

- \* Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- \* Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- \* Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- \* Observing visible or invisible laser beams with the human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- \* No laser device should be used in any application or situation where life or property is at risk in event of device failure.
- \* Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.

\* For reference only. Contents above are subject to change without notice.







**Arima**  
LASERS

# AlGaInP Visible Laser Diode

**ADL-66Z01HL**

6-2D-LD66-006\_Rev.00

PRELIMINARY

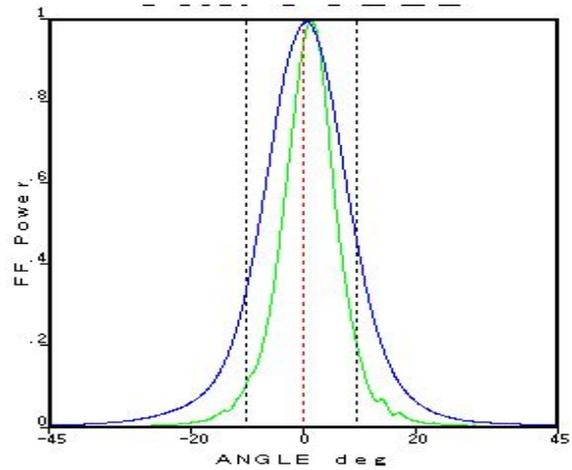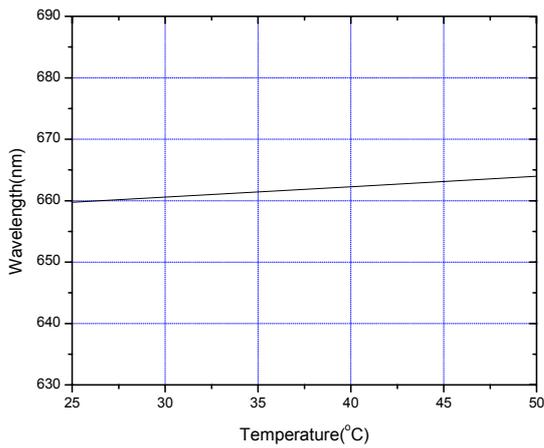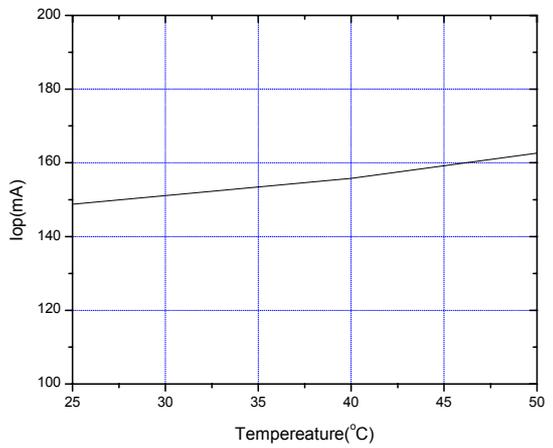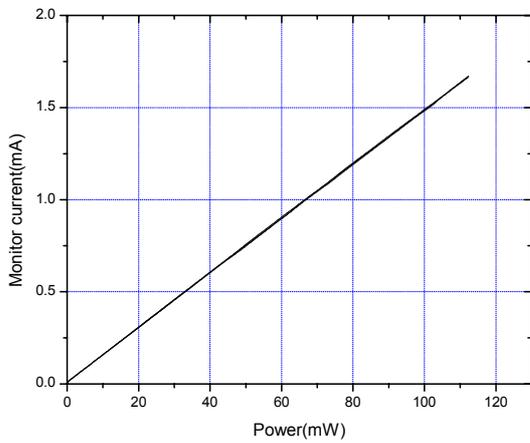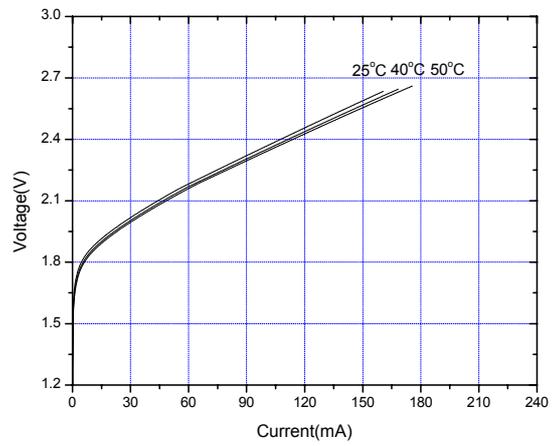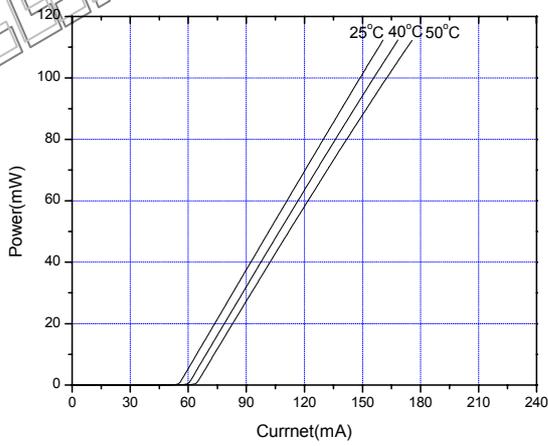

\* For reference only. Contents above are subject to change without notice.