

AIGaInP Visible Laser Diode


ADL-65077SU

DATE : 2005/10/18 Ver 1.0

★ φ3.3mm Mini Package!
7mW Reliable Operation

•Features

1. Smallest package
2. Low operating current
3. Higher power

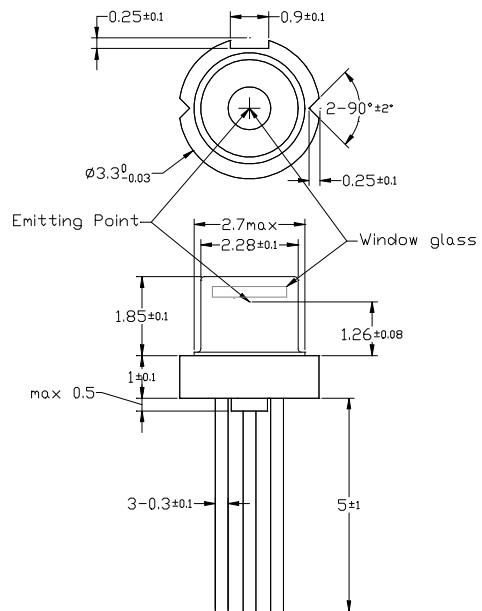


•Applications

1. Super slim DVD/Combo OPU
2. Mini size optical modules
3. Laser sensor

•Absolute maximum ratings

Parameter	Symbol	Condition	Rating	Unit
Light output power	P _O	CW	10	mW
Reverse voltage (LD)	V _{RL}	-	2	V
Reverse voltage (PD)	V _{RP}	-	30	V
Forward current (PD)	I _{FD}	-	10	mA
Case temperature	T _C	-	-10~+70	°C
Storage temperature	T _S	-	-40~+85	°C

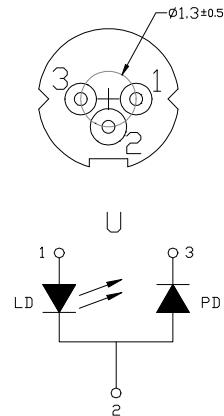

•Electrical and optical characteristics ($T_c=25$ °C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Peak wavelength	λ	645	655	660	nm	$P_o=7$ mW
Threshold current	I _{th}	-	20	25	mA	
Operating current	I _{op}	-	25	35	mA	$P_o=7$ mW
Operating voltage	V _{op}	-	2.2	2.5	V	$P_o=7$ mW
Differential efficiency	η	0.7	0.9	1.2	mW/mA	$P_o=3-5$ mW
Monitor current	I _m	0.3	0.4	0.6	mA	$P_o=7$ mW
Parallel divergence angle	$\theta_{ }$	6	9	12	deg	
Perpendicular divergence angle	θ_{\perp}	25	28	32	deg	
Parallel FFP deviation angle	$\Delta \theta_{ }$	-2	0	+2	deg	$P_o=7$ mW
Perpendicular FFP deviation angle	$\Delta \theta_{\perp}$	-2	0	+2	deg	
Emission point accuracy	$\Delta x \Delta y \Delta z$	-80	0	+80	um	

• Precautions

- * Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- * Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- * Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- * Observing visible or invisible laser beams with the human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- * No laser device should be used in any application or situation where life or property is at risk in event of device failure.
- * Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.








** For reference only. Contents above are subject to change without notice.*

Arima
LASERS

AlGaInP Visible Laser Diode

ADL-65077SU

DATE : 2005/10/18 Ver 1.0

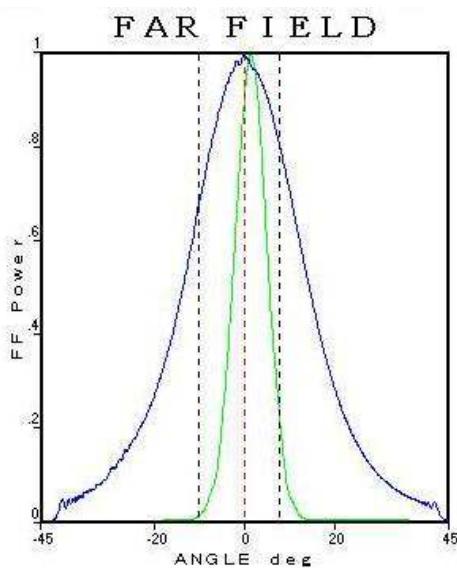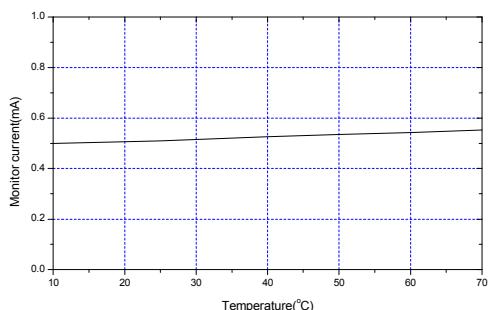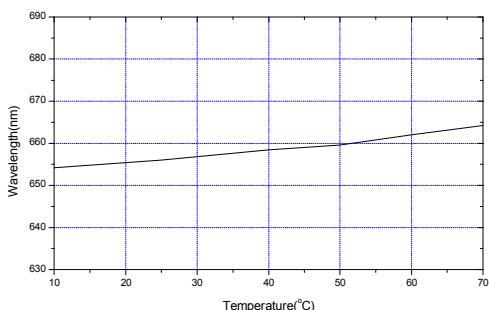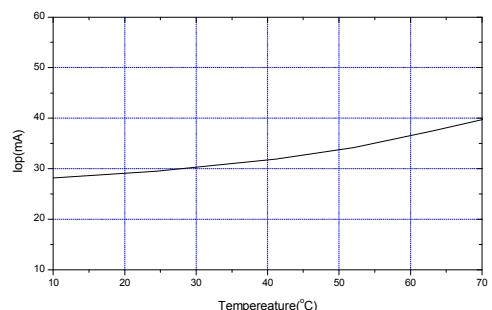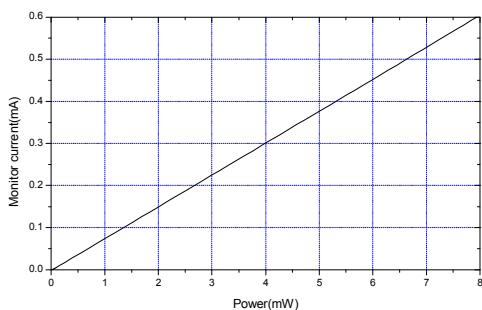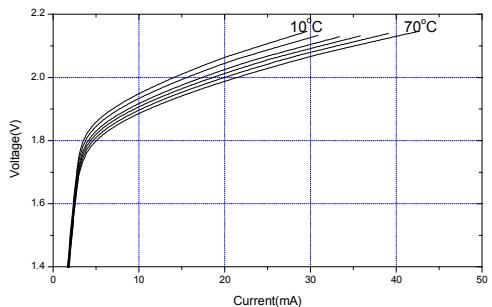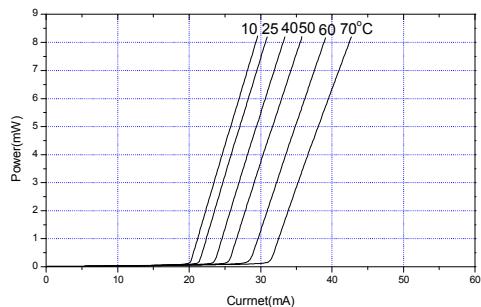

* For reference only. Contents above are subject to change without notice.

Arima
LASERS